

HALFPINT


Classic Series

18-Watt Cathode-Biased
Tube Amplifier
Head or 1x12 Combo

Owner's Manual

Table of Contents

Introduction.....	3
Safety Instructions	3
Features.....	4
Front Panel.....	5
Rear Panel.....	6
Warranty.....	7
Specifications.....	8



SonicTone Amplification, LLC
P.O. Box 24456
New Orleans, LA 70184
contact@sonictoneamps.com
www.sonictoneamps.com
Made in the USA

Introduction

I'd like to personally thank you for purchasing the SonicTone Halfpint tube amplifier. I know how important every player's tone is to them and that consideration goes into every amp. Carefully designed and hand-built here in the U.S., the Halfpint is a small amplifier that packs a big punch. It is a "little brother" to the RC30 and the '81 Special and it has quite the bite. From a nice chimey clean to a raucous overdrive crunch, this amp will deliver some fantastic tones for you to use when playing live or in the studio. Good luck and enjoy the amp!

Sincerely,



Nick Sagona

Safety Instructions

1. Always use the correct types of tubes for this amplifier.
2. Always match the impedance to correct value of the speaker load.
3. Do not attempt to bypass the fuses or use different fuse values.
4. Please only use the provided SonicTone footswitch, which is compatible with this amplifier.
5. Please only use a TRS cable to connect the footswitch to the amplifier.
6. Please operate the amplifier in dry and safe conditions.
7. Please store the amplifier in a reasonable, climate-controlled environment.
8. If you are experiencing issues with the amplifier, please have it worked on by a qualified service technician only. Do not attempt to open the amp and work on it yourself.

⚡ WARNING! ⚡

Dangerous and potentially lethal voltages may be present in the amplifier even after it has been turned off and unplugged. Do not open the amp yourself or touch the inside of it. Only have a qualified service technician open up and work on the amplifier.

Features

The Halfpint is an 18-watt, cathode-biased tube amplifier that uses three (3) 12AX7 preamp tubes, two (2) EL84 power tubes and one (1) EZ81 rectifier tube. Its features include:

- 2 channels with independent gain controls (footswitchable)
- Shared 3-band EQ with presence
- Master volume
- Bright switch on channel 1
- Classic/Hotrod switch on channel 2
- Buffered FX loop, bypassable
- Tube/solid-state rectifier switch
- Negative feedback selector switch
- Half-power pentode/triode switch
- 3-way output impedance switch (16, 8 or 4 ohm)
- 12" Celestion 65-watt 16 ohm Creamback speaker (stock combo only)
- Birch plywood cabinet with finger-jointed construction
- Footswitch


Tube/Solid-State Rectifier Switch:

The tube/solid-state rectifier switch is another interesting feature that can give you a subtle tonal option. When set to the tube rectifier, the amp will produce a slightly more vintage sound, where there is a little more compression and sag with the sound. Some players prefer this, saying that it gives the amp a more vocal and spongy sound and that the notes have a nice "touch" or "bloom" to them. However, if that's not your preference, switching to the solid-state rectifier will give the amp a slightly more aggressive sound with a more firm and immediate response.

Footswitch Operation:


The footswitch requires the 1/4" TRS cable to be inserted into the footswitch jack on the rear panel as well as the jack on the footswitch. The "CH1 / CH 2" switch on the front panel is automatically defeated if the footswitch cable is plugged into the footswitch jack on the rear panel.

Front Panel

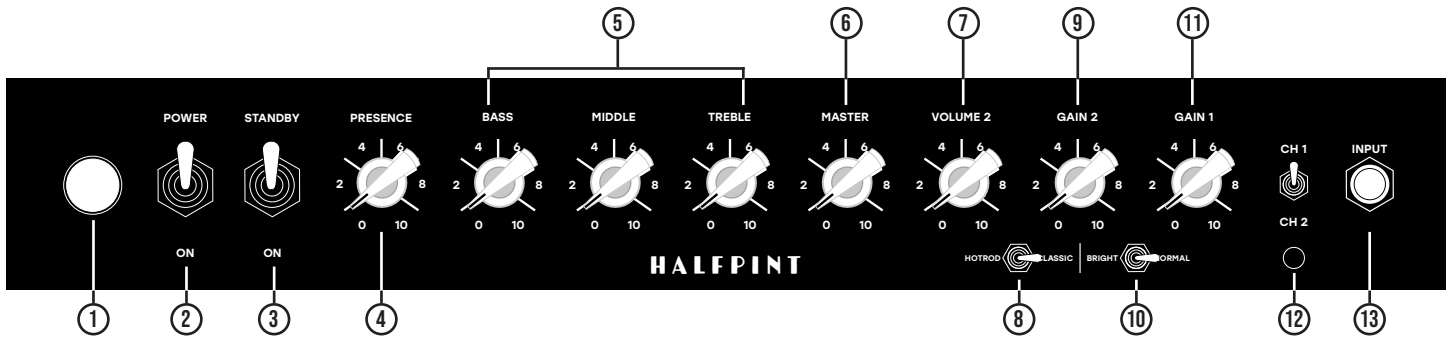

1. **Pilot Light** - illuminates when the amp is turned on.
2. **Power Switch** - turns the amp on.
3. **Standby Switch** - allows the amp to be played. When the standby is off, the tubes are kept warm, but the amp will not make any sound.
4. **Presence** - active tonal control that can be used to brighten up the amp's overall sound.
5. **Bass, Middle and Treble** - passive equalization controls to adjust the tone of the amp.
6. **Master** - the overall master volume of the amp.
7. **Volume 2** - control to adjust the overall volume on channel 2.
8. **Hotrod/Classic** - switch to engage a bolder tone on channel 2. In "Hotrod" mode, channel 2 will have additional gain and a more aggressive, slightly brighter voicing.
9. **Gain 2** - control to adjust the amount of gain on channel 2.
10. **Bright Switch** - switch to engage a brighter tone on channel 1.
11. **Gain 1** - control to adjust the amount of gain on channel 1.
12. **CH 1 / CH 2 Switch & LED** - switch to change between channels 1 and 2 when not using the footswitch. The LED illuminates when channel 2 is engaged.
13. **Input Jack** - mono input jack to plug your guitar into.

Rear Panel

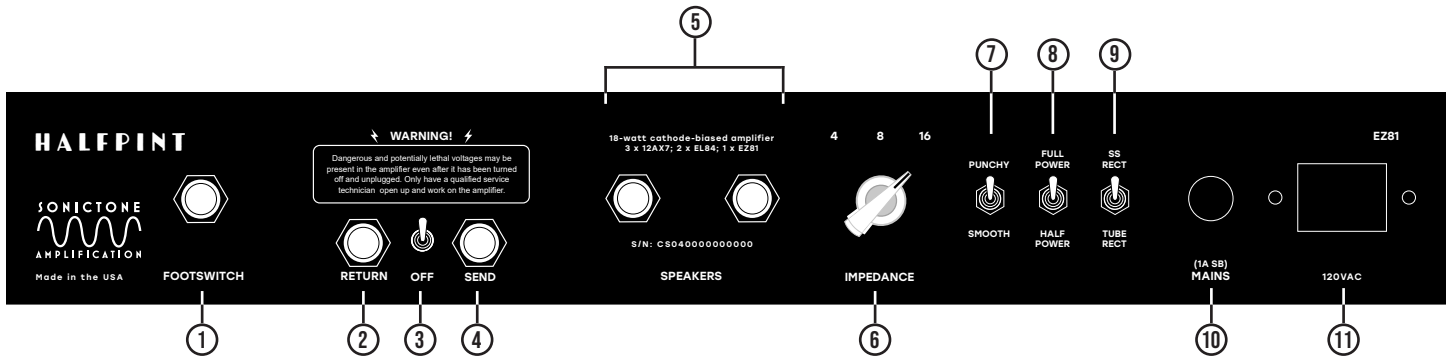

1. **Footswitch Jack** – stereo input jack to plug the provided 1/4” TRS footswitch cable into.
2. **FX Loop Return Jack** – mono input jack for the return FX loop signal.
3. **FX Loop Bypass Switch** – switch to fully bypass the FX loop circuit.
4. **FX Loop Send Jack** – mono input jack for the send FX loop signal.
5. **Parallel Speaker Jacks** – mono input jacks to plug the speaker(s) into. PLEASE NOTE: The jacks are in parallel, so if you plug two equal impedance speaker loads into them, you must set the impedance switch to half their impedance. For example, with two 16 ohm speaker loads plugged in, the impedance switch should be set to 8 ohms.
6. **Impedance Selector Switch** – switch to select the correct impedance of the speaker load hooked up to the amp.
7. **Punchy/Smooth Switch** – switch to change the amount of negative feedback injected into the amp. The “punchy” setting has less NFB and is more aggressive sounding. The “smooth” setting has more NFB and is less aggressive sounding.
8. **Full/Half Power Switch** – switch to change the power setting between half and full power. This feature changes the operation of the power tubes between pentode (full) and triode (half.) The amount of power reduction in wattage is approximate.*
9. **Solid State/Tube Rectifier Switch** – switch to change between using the tube rectifier or the solid state rectifier. Using the tube rectifier will produce more of a vintage sound which is more compressed and spongy. Using the solid-state rectifier, the sound will be more firm and aggressive.
10. **Fuse Holder** – receptacle for the amp’s main fuse. There’s an additional high voltage fuse located inside the amp.
11. **AC Jack** – jack to plug the provided AC cord into.

A note about the FX Loop – When the FX loop is off (bypassed), the entire signal will bypass the FX loop circuit altogether. However, the send and return jacks are switched jacks that are connected together when nothing is plugged into them. Therefore, when the circuit is on, signal will be allowed to pass through the FX loop if nothing is plugged into it. Once a cable is inserted into either one of the jacks, that connection is broken and will the signal will go out through the send jack and have to be returned through the return jack.

* Please note, the power reduction in wattage **does not** equate to a 50% reduction in overall loudness (dB.)

2-Year Limited Warranty

This amplifier is protected with a limited, 2-year warranty for any and all defective issues with the build workmanship and parts, excluding tubes, transformers and speakers. The warranty does not cover general wear and tear, neglect, misuse or abuse, damage from liquids (water, alcohol, etc.), disasters, acts of God or unauthorized modifications. Any modifications made to the amp by the owner or a technician will void the warranty. The owner is responsible for all warranty shipping costs. Once the warranty work is completed, the customer will be notified and sent a final shipping invoice. The owner then is required to pay the shipping invoice to have the repaired amp shipped back to them. Returned warranty shipping will be insured and will require a signature.

Specifications

Product Series: Classic Series
Product Model: Halfpint Head or 1x12 Combo

AC Input & Fuses:

- U.S. Standard IEC jack rated for 120V @ 60Hz
- 1A slo-blo mains fuse
- 0.5A slo-blo high voltage (B+) fuse

Tubes:

- Three (3) 12AX7 preamp tubes
- Two (2) EL84 power tubes
- One (1) EZ81 rectifier tube

Power Output:

- 18W @ 16, 8 or 4 ohms

Speaker:

- One (1) 12-inch 65W 16 ohm Celestion Creamback (*stock combo only*)

Footswitch:

- Single button SonicTone footswitch
- TRS cable required for proper operation


Dimensions:

1x12 Combo

- Width: 24 in
- Height: 20.75 in
- Depth: 10 in
- Weight: 39.0 lbs

Head

- Width: 24 in
- Height: 10.75 in
- Depth: 9 in
- Weight: 28.0 lbs



www.sonictoneamps.com
Made in the USA